Claybrook.

CLA-WC-2370-B00

CLOSE COUPLED WC

CONTENTS

Contents & Introduction	1
Close Coupled Toilet Line Drawing	2
Close Coupled Toilet Installation	3
Close Coupled Toilet Installation (Cont.)	4
Toilet Seat Installation	5
Trouble Shooting, Operation And Maintenance	6

INTRODUCTION

To The Installing Plumber:
Please leave this instruction manual for the customer.


DO NOT USE Concrete, Sand & Cement Mix or any other similar product when installing the pan, doing so will void product warranty.


Prior to Installation
Visual inspection & installation requirements:

1. All product to be removed from packaging and checked to ensure the product is in good order and condition and that all parts required for correct installation have been supplied. Any product that is faulty or has parts missing is to be returned following our returns T&C's.

2. All sanitary ware products must be installed by a licensed plumber in accordance with the relevant installation instructions and all U.K. standards and local authority requirements.

CLOSE COUPLED TOILET LINE DRAWING

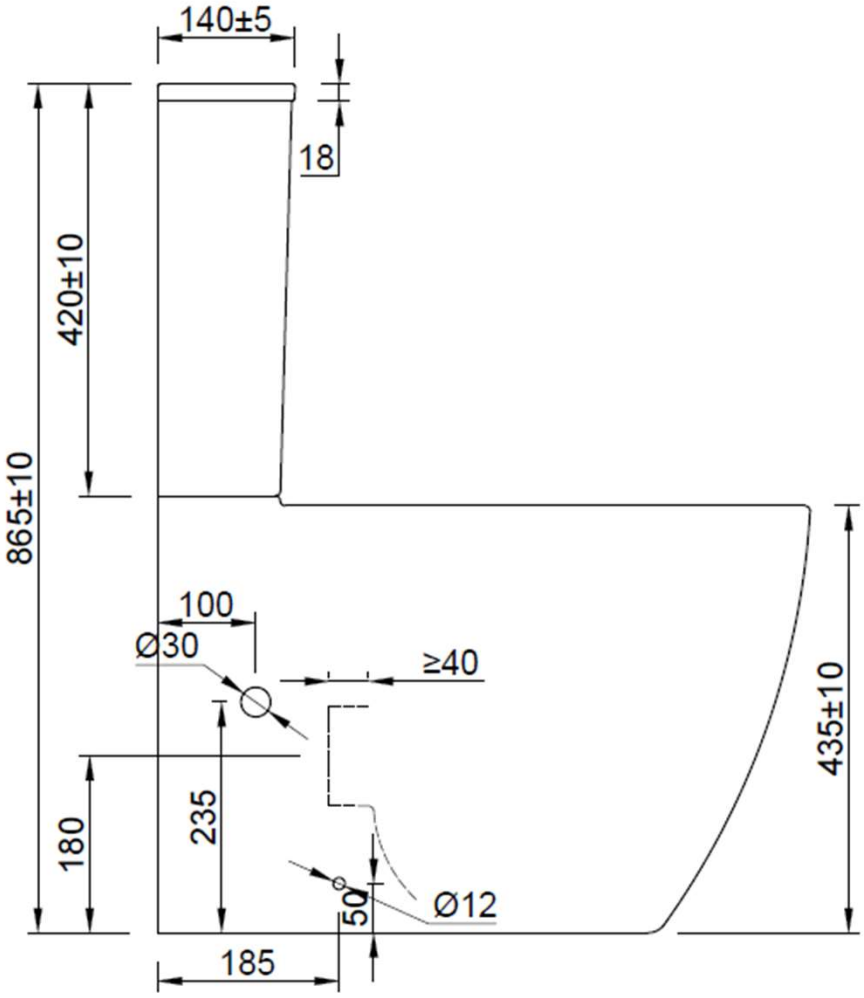

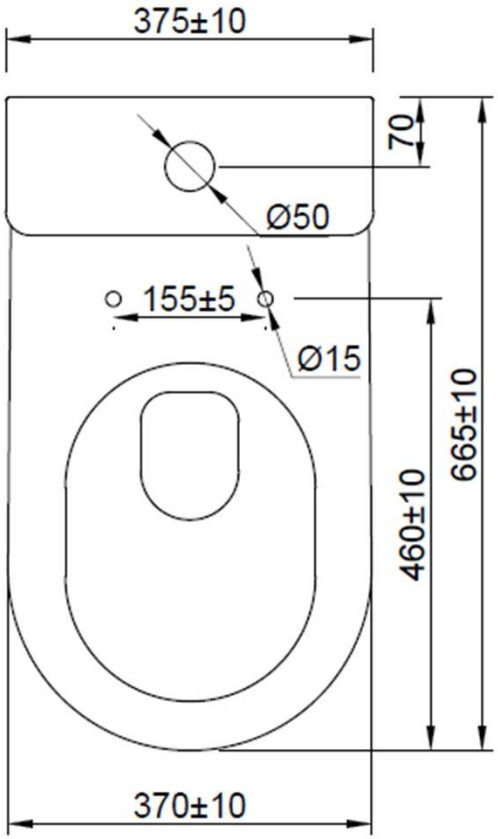

CLOSE COUPLED TOILET INSTALLATION

Combine all the parts and turn the flush valve as per the diagram, and make sure it won't block the holes (Fig 1).
When fitting the cistern to the pan take care to ensure the gasket is properly aligned in the gasket location (failing to do so could result in leakage) (Fig 2).
Measure the distance for the anchor screws, fix them on the floor and reserve a water inlet valve position as per the diagram (Fig 3).



Fig 1

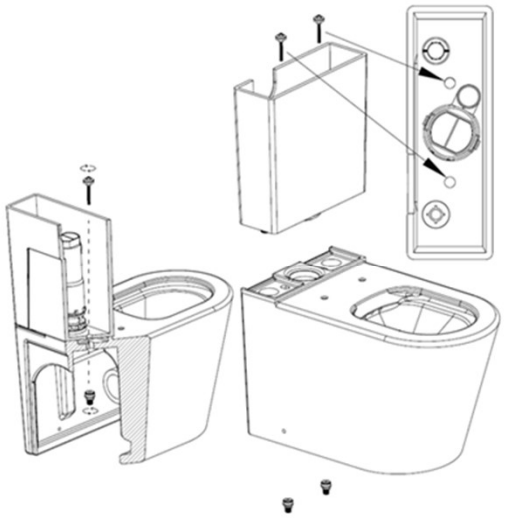


Fig 2

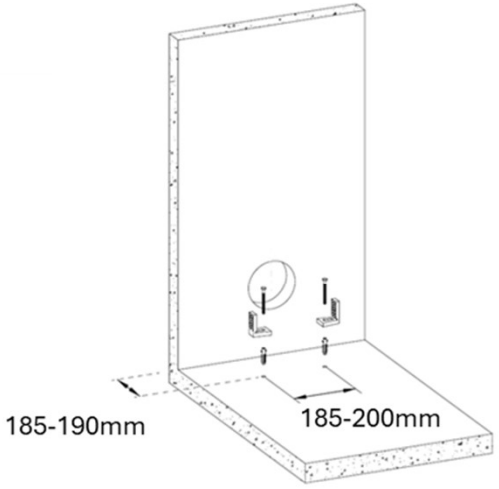


Fig 3

CLOSE COUPLED TOILET INSTALLATION (CONT.)

Insert the waste pipe into the drain hole and adjust the anchor screws to make sure the bottom of toilet pan is corresponding and tighten it.
Align the P-trap pipe with the drainpipe, push and align the toilet to the wall (Fig 4).
Use a braided tube connecting the angle valve with the water inlet valve, connect the water inlet valve with the flush valve (Fig 5).

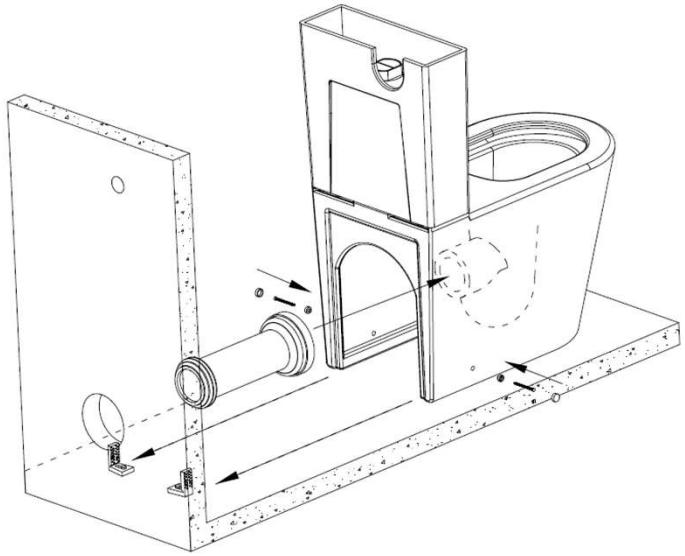


Fig 4

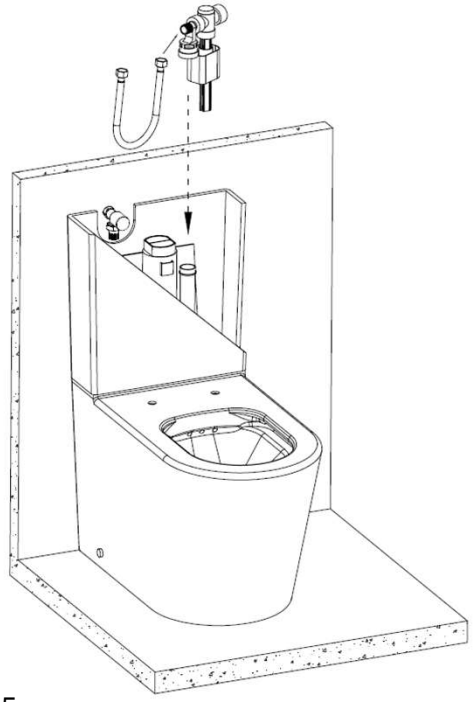


Fig 5

TOILET SEAT INSTALLATION

Remove the seat and cover from its box. Insert the top fixing rawl plugs into the seat bolt holes. Place the hinge blocks, without the stainless-steel covers, over the rawl plugs and loosely fix the screw though the hinge blocks into the rawl plugs (Fig 6).
Fit the seat and cover onto the hinge blocks by locating the fixing holes onto the hinge pins and push into place. Close the seat and cover onto the pan and adjust the position in line with the rim of the pan. Tighten the screws. Open the seat and cover and depress the quick fix buttons to remove the seat and cover. Place the stainless-steel covers over the hinge blocks and replace the seat (Fig 7).

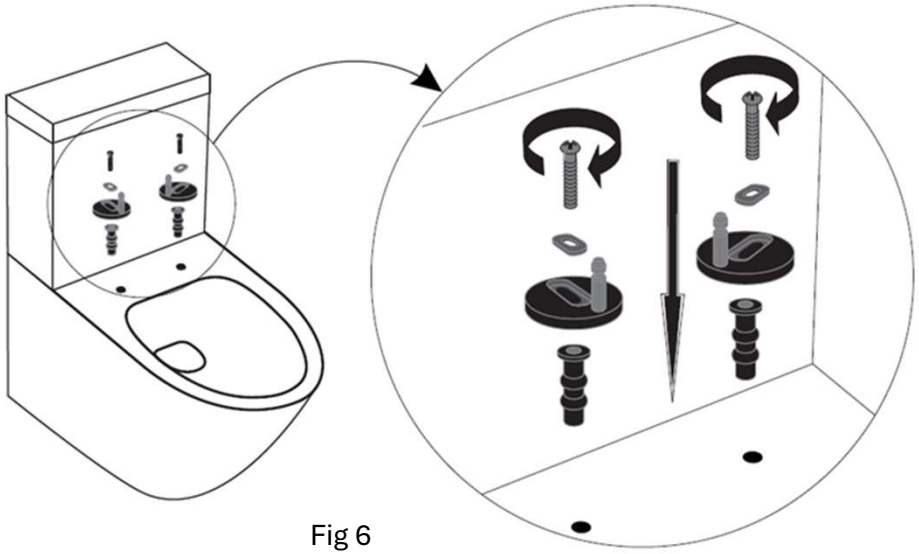


Fig 6

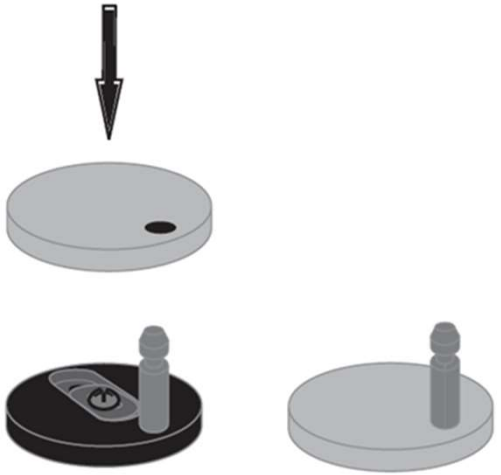


Fig 7

TROUBLE SHOOTING, OPERATION AND MAINTENANCE

Trouble Shooting

Problem	Possible Cause	Solution
Water is leaking into the pan.	Water level is set too high.	Re-adjust the inlet valve to lower the water level below the overflow pipe height.
	Outlet valve seal is leaking.	Remove outlet valve and clean outlet seal and seat or replace outlet seal.
Water is leaking onto the floor.	Flexible hose or connections are leaking.	Retighten connections or replace hose.
	Cistern fitting components are leaking.	Check and retighten Outlet, Inlet and plug nuts.
	Outlet connector broken or not engaged correctly.	Uninstall pan and check connector. Engage pan correctly, and/or replace connector.

Operation And Maintenance

- For Non-Solid Waste removal use the half flush button to conserve water.
- To clean the toilet suite only use warm soapy water, DO NOT use chemical cleaners.
- Do not place chemical additives into the cistern tank as chemical additives can deteriorate the sealing rubber and valve components.

Claybrook.

CONTACT US

+44 (0) 20 7052 1555

enquiries@claybrookstudio.co.uk

contracts@claybrookstudio.co.uk