
Claybrook.

CABOODLE

This stunning square range has large tonal gradation from tile to tile, creating a blend or melange simply by using one colourway. The gloss is for wall only but the matt, with excellent slip resistance, can be used for walls or floors.

4 COLOURS / 2 FINISHES / 1 FORMAT

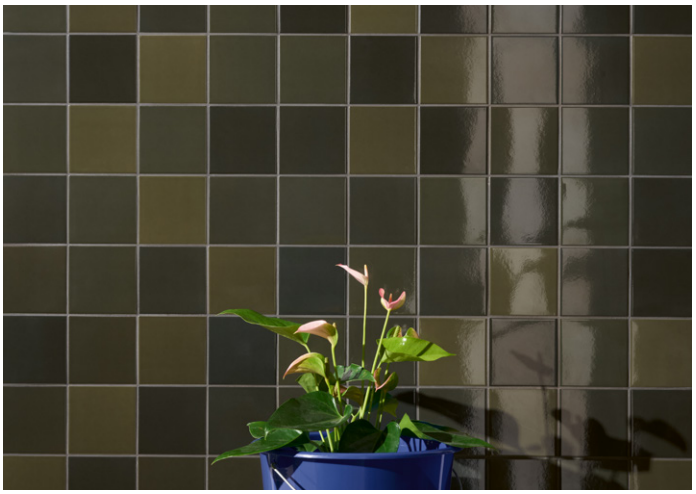

Caboodle Peapod Gloss




Caboodle Marmalade Matt


COLOURS




Merringue Matt

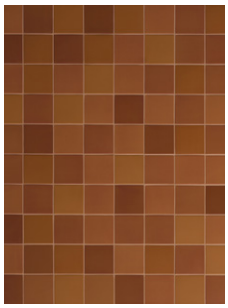


Marmalade Matt




Berry Matt




Peapod Matt



Merringue Gloss



Marmalade Gloss



Berry Gloss



Peapod Gloss

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Square	100 x 100 (+- 2mm)	8	Porcelain	All	3 - 4mm	60

Print colours may vary from actual product, so tile samples should be requested before ordering.
For advice on shade variation of V3 and above, please speak to our showroom.
If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

1.11.26

Claybrook.

CABOODLE

Installation and Technical Advice

 Shade Variation / V4 - Extreme

 Slip Rating / Matt Finsh - R10 | PTV 36+ Shod

 Material / Porcelain

 Requires Sealing / No

Recycled Contents / 45%

Planning & Layout - All substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable tile backer board or cement board. Do not use plasterboard

Cutting Advice - Use a water-cooled flat-bed tile cutter with a smooth-profiled unslotted blade and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding block. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur. We do not recommend external mitres on any glazed tiles.

Sealing & Grouting Advice - We recommend using our Ardex FS format grout, as this has been tested with our products and is available to purchase online. We do not recommend using dark-coloured or fine grouts for joint widths down to 1mm (such as Bal MicroMax) as this can cause staining. If not using Ardex FS or FL grout, then please test your chosen grout on a sample before applying to the wall.

Installation Notes - The gloss is for wall use only. These tiles slightly vary in dimension and thickness, especially between batches. If conducting your project in phases, you will ideally need to buy all the tiles required in one purchase. These tiles are uncalibrated, so need to be installed by eye not spacers at every joint, with a 3-4 mm joint to absorb the slight size variance.

Ongoing Maintenance - We recommend using EcoProtec's Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this is a ph neutral cleaner and will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec's Stone and Tile Intensive Cleaner.

For further advice on installation please contact **enquiries@claybrookstudio.co.uk** with any questions.

TECHNICAL DATA	INDUSTRY STANDARD	REQUIREMENT	PRODUCT VALUE
Length and Width	BS UNI ENISO 10545-2	0.6% +/- 2mm	+/-0.9%
Thickness	BS UNI ENISO 10545-2	5% +/- 0.5mm	+/-0.5%
Edge Straightness	BS UNI ENISO 10545-2	0.5% +/- 1.5mm	+/-0.75%
Surface Flatness	BS UNI ENISO 10545-2	0.5% +/- 2mm	+/-0.75%
Water Absorption	BS UNI ENISO 10545-3	≤0.5%	<0.3%
Breaking Strength	BS UNI ENISO 10545-4	≥35N/mm2	≥40N/mm2
Resistance to Abrasion	BS UNI ENISO 10545-6	≤175mm3	PEI 5
Thermal Shock Resistance	BS UNI ENISO 10545-9	Pass	Pass
Frost Resistance	BS UNI ENISO 10545-12	No alteration to surface	No alteration
Chemical Resistance (domestic)	BS UNI ENISO 10545-13	GB min	LA HA A
Stain Resistance (domestic)	BS UNI ENISO 10545-14	Class 3 min	Class 5