

Claybrook.


CEDAR POINT

This replica marble porcelain has all the qualities we were looking for to contrast with warmer toned interiors. The veining is a subtle pale brown, the two sizes work well in smaller or larger areas and the larger size also comes in a polished format.

1 COLOUR / 2 FINISHES / 2 FORMATS / 1 MOSAIC



Cedar Point 75x75 Matt

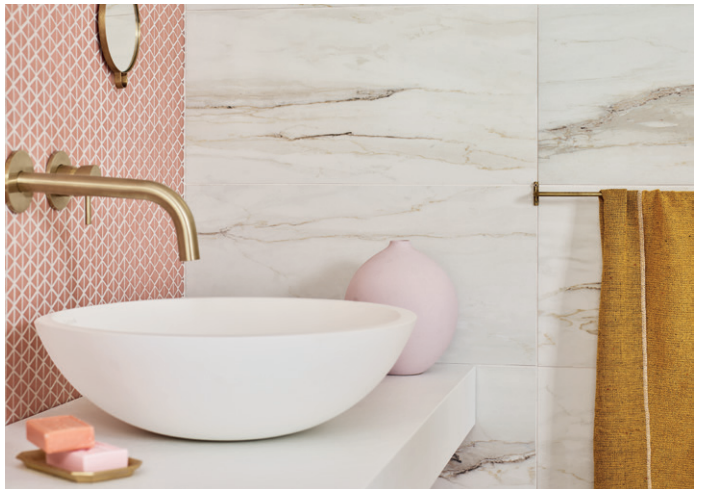

Cedar Point 30x60 Matt and Confiserie Blush Triangles

COLOURS



Cedar Point

MOSAIC



Cedar Point Matt Mosaic

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Rectangle Matt	300 x 600	9.5	Glazed Porcelain	All	3	5
Square Matt	750 x 750	10.5	Glazed Porcelain	All	3	2
Square Polished	720 x 720	10.5	Glazed Porcelain	All	3	2
Mosaic Matt	290 x 290	10	Glazed Porcelain	All	3	4



Shade Variation / V3 - Moderate



Slip Rating / N/A



Material / Glazed Porcelain



Requires Sealing / No

* A ramp slip rating (R) value where quoted, is determined from tests carried out on one batch and the result can vary from batch to batch. Please contact technical@claybrookstudio.co.uk for further information.



CEDAR POINT

Installation and Technical Advice

Planning & Layout - all substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls or joist floors, then all lateral movement must be made absolutely minimal using suitable plywood or cement board. The Cedar Point 30x60cm, 72x72cm and 75x75cm tiles should **not** be laid in a brick-bond with 1/2 overlap, instead use a staggered bond (1/3 overlap) to avoid any lipping. The polished finish can be used on the floor, but it is not recommended for areas that may get wet, due to the slip-hazard.

Cutting advice - use a water-cooled tile cutter and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding stone. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

Sealing & Grouting advice - no sealer required. To avoid excessive grout residue, we recommend using our Ardex FL format grout which has been tested with our products, and is available to purchase online. We do not recommend using contrasting-coloured or fine grouts for joint widths down to 1mm, as these can cling to the surface making the tiles more difficult to clean-down after grouting.

Ongoing Maintenance – We recommend using EcoProtec's Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this will not affect the tile's slip rating and will not attack the surface of the grout. For an occasional deeper clean, you can use EcoProtec's Stone and Tile Intensive Cleaner. The tile does not need re-sealing.

For further advice on installation please contact technical@claybrookstudio.co.uk with any questions.

TECHNICAL DATA	INDUSTRY STAND- ARD	REQUIREMENT	PRODUCT VALUE - MATT	PRODUCT VAL- UE - POLISHED
Length and Width	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.6%	≤0.6%
Thickness	BS UNI ENISO 10545-2	5% +/- 0.5mm	≤5%	≤5%
Edge Straightness	BS UNI ENISO 10545-2	0.5% +/- 1.5mm	≤0.5%	≤0.5%
Rectangularity	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%	≤0.5%
Surface Flatness	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%	≤0.5%
Surface Appearance (% of surface free of flaws)		≥95%	>95%	>95%
Water Absorption	BS UNI ENISO 10545-3	≤0.5%	0.5%	0.5%
Breaking Strength	BS UNI ENISO 10545-4	≥35N/mm ²	>35N/mm ²	>35N/mm ²
Resistance to Abrasion	BS UNI ENISO 10545-7	≥175mm ³	≥175mm ³	≥175mm ³
Thermal Shock Resistance	BS UNI ENISO 10545-9	Pass	Pass	Pass
Frost Resistance	BS UNI ENISO 10545-12	No alteration to surface	No alteration	No alteration
Chemical Resistance (domestic)	BS UNI ENISO 10545-13	GB min	GA	GA
Stain Resistance (domestic)	BS UNI ENISO 10545-14	Declared value	Class 5	Class 5

Print colours may vary from actual product, so tile samples should be requested before ordering.

For advice on shade variation of V3 and above, please speak to our showroom.

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

