

Claybrook.

# FELLINI

Named after the writer and film director, these brick-shaped porcelain tiles are redolent of hand-crafted Moroccan Zellige. Each varies slightly in glaze shading and depth of pigmentation, creating a beautiful effect for walls. Italian-made, they are available in two finishes.

9 BASES / 2 FINISHES / 1 FORMAT




Fellini Pianta Gloss and Crema Gloss



Fellini Bianco Gloss and Oliva Gloss

## GLOSS VARIATION

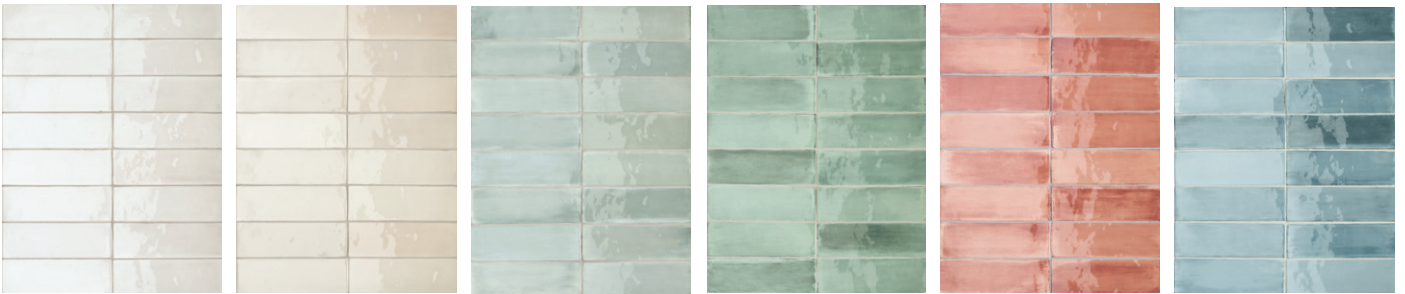

Bianco Gloss

Crema Gloss

Oliva Gloss

Pianta Gloss

Argilla Gloss

Onda Gloss

## GLOSS COLOURS



Bianco Gloss

Crema Gloss

Oliva Gloss

Pianta Gloss

Argilla Gloss

Onda Gloss



Nuvola Gloss

Paradiso Gloss

Rosa Gloss



Nuvola Gloss

Paradiso Gloss

Rosa Gloss




# Claybrook.

## FELLINI

---

### MATT VARIATION

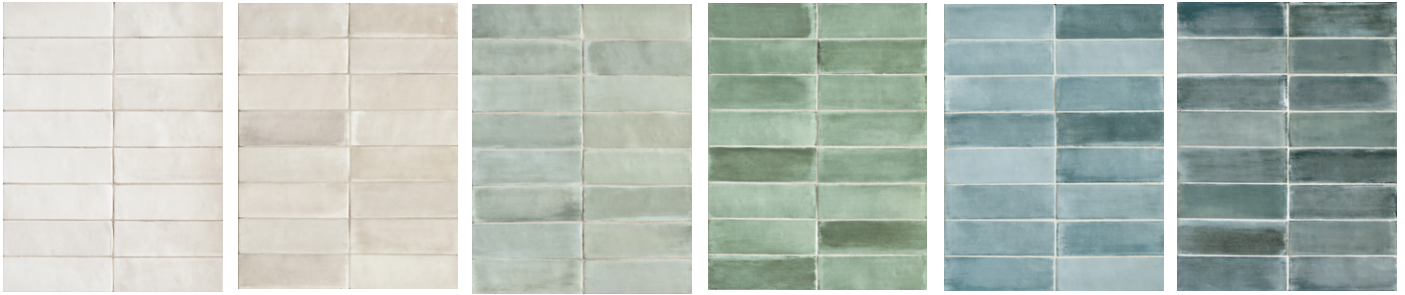

Bianco Matt

Crema Matt


Oliva Matt

Pianta Matt

Onda Matt

Nuvola Matt

### MATT COLOURS



Bianco Matt

Crema Matt

Oliva Matt

Pianta Matt

Onda Matt

Nuvola Matt



Paradiso Matt



Paradiso Matt

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Rectangle	52 x 160	10	Glazed Ceramic	All	3	50



Shade Variation / V4 - Extreme



Requires Sealing / No



Material / Glazed Ceramic

If you require any further assistance regarding specification data, technical advice or samples, please contact [enquiries@claybrookstudio.co.uk](mailto:enquiries@claybrookstudio.co.uk) or [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk)



Claybrook.

# FELLINI

## Installation and Technical Advice

**Planning & Layout** - all substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable plywood or cement board.

**Cutting Advice** - use a water-cooled flat bed tile cutter and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding stone. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

**Sealing & Grouting Advice** - no sealer required. To avoid excessive grout residue, we recommend using our Ardex FS format grout which has been tested with our products and is available to purchase online. We do not recommend using contrasting-coloured or fine grouts for joint widths down to 1mm, as these can cling to the surface making the tiles more difficult to clean-down after grouting.

**Ongoing Maintenance** – We recommend using EcoProtec’s Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec’s Stone and Tile Intensive Cleaner. The tile does not need re-sealing.

**Installation Notes** - For wall use only. Tiles may vary in colour from batch to batch. This is for colour reference only. Please be aware these tiles vary greatly in shade within each colour option, and one sample will not be representative of the selection you will receive if ordering larger quantities.

For further advice on installation please contact [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk) with any questions.

TECHNICAL DATA	INDUSTRY STANDARD	REQUIREMENT	PRODUCT VALUE
Water Absorption	BS UNI ENISO 10545-3	≤0.5%	Conforms
Breaking Strength	BS UNI ENISO 10545-4	≥35N/mm <sup>2</sup>	Conforms
Crazing resistance	BS UNI ENISO 10545-4		Resistant
Chemical Resistance (domestic)	BS UNI ENISO 10545-13	GB min	GA
Stain Resistance (domestic)	BS UNI ENISO 10545-14	Class 3 min	Class 5

If you require any further assistance regarding specification data, technical advice or samples, please contact [enquiries@claybrookstudio.co.uk](mailto:enquiries@claybrookstudio.co.uk) or [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk)

