

Claybrook.


KAJAGOOGOO

These incredibly striking tiles are a blend of styles, combining the appeal of encaustic cement with the visual appeal of authentic terrazzo. Beautiful on floors, but great for walls too.

1 FINISH / 1 FORMAT / 3 DECORS




A selection of samples

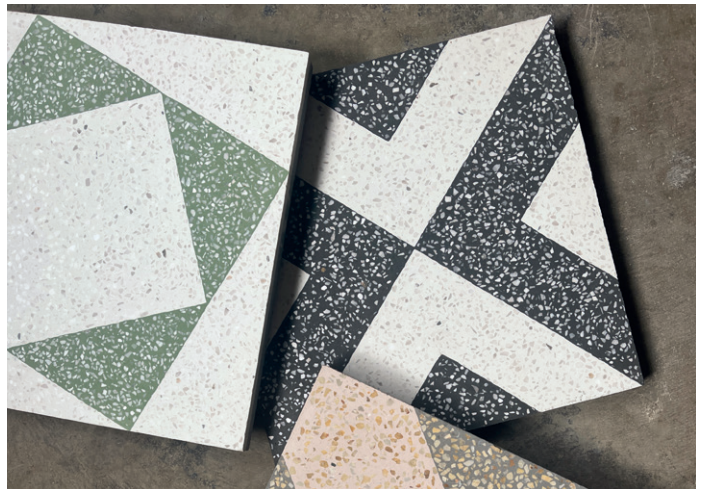

A selection of samples

DECORS

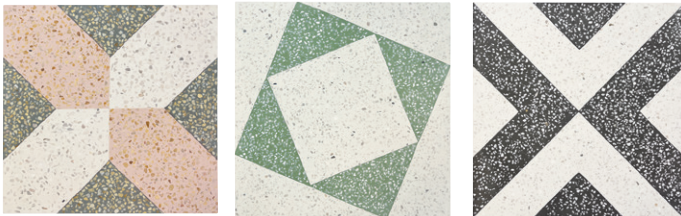

Limahl

Askew

Strode

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	DECORS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Square	200 x 200 (1-2 mm tolerance)	16	Encaustic Terrazzo	All	3-5	12



Shade Variation / V3 - Moderate



Requires Sealing / Yes



Material / Encaustic Terrazzo

Print colours may vary from actual product, so tile samples should be requested before ordering. For advice on shade variation of V3 and above, please speak to our showroom.



Claybrook.
KAJAGOOGO

Installation and Technical Advice

Please refer to our Encaustic Installation Guide for details on how best to install this product.

Planning & Layout - all substrates should be flat, sound, dust-free and primed using Ardex P51 Primer and Bonding agent. Whilst we do not recommend encaustic tiles for wet-room floors, they can be used on shower walls if the substrate is suitably tanked and any movement is made absolutely minimal.

Cutting Advice – We recommend using a flat-bed water-cooled tile cutter and planning the tile layout in such a way to avoid cuts less than 15mm. Always cut through the tile with the visible face uppermost and tidy any chipping with a rubbing/sanding stone or wet and dry paper. Ensure the tile cutter blade is clean, unslotted and continuous with a smooth cutting face. Also ensure the water is regularly changed otherwise excess staining can occur.

Sealing & Grouting Advice – For full details on sealing and grouting, please ask your installer to read the Encaustic Installation Guide.

Ongoing Maintenance – We recommend using EcoProTec Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this will not attack the surface of the tile or grout. For an occasional deep clean, you can use EcoProTec Intensive Cleaner at the dilution advice on the bottle. Depending on whether EcoProTec Satin Surface Wax has been applied, and the footfall and cleaning regime, the average domestic bathroom/kitchen will need the finishing wax re-applied every 6/12 months.

For advice on commercial installations please see the Installation guide or contact technical@claybrookstudio.co.uk with any questions.

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

