Claybrook.

KITAMI

Named after the pretty Japanese city that's home to lakes, mountains and natural beauty, these glazed wall mosaics have a tactile moulded finish. Alongside a simple linear relief design, the colourways are ideal for bathrooms and kitchens or even bars and restaurants.

4 MOSAICS / 1 FINISH / 1 FORMAT



Kitami Saroma




Kitami Bamboo and Hoji


MOSAICS




Hako



Saroma



Hoji



Bamboo

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Mosaic	296 x 315	8	Glazed Porcelain	All	2	11

Shade Variation / V2 - Slight

Requires Sealing / No

Material / Glazed Porcelain

Print colours may vary from actual product, so tile samples should be requested before ordering.
For advice on shade variation of V3 and above, please speak to our showroom.
If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

Claybrook.

KITAMI

Installation and Technical Advice

Planning & Layout - All substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable tile backer board or cement board. Do not use plasterboard


Cutting Advice - Use a water-cooled flat-bed tile cutter with a smooth-profiled unslotted blade and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding block. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

Sealing & Grouting Advice - We recommend using our Ardex FS format grout, as this has been tested with our products and is available to purchase online. We do not recommend using dark-coloured or fine grouts for joint widths down to 1mm (such as Bal MicroMax). If not using Ardex FS or FL grout, then please test your chosen grout on a sample before applying to the wall.

Installation Notes - For wall use only. These tiles slightly vary in dimension and score alignment, especially between batches. If conducting your project in phases, you will ideally need to buy all the tiles required in one purchase, to minimise the variance. Due to the relief profile of these tiles, your tiler will need to take extra care when cleaning back the grout.

Ongoing Maintenance - We recommend using EcoProtec's Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this is a ph neutral cleaner and will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec's Stone and Tile Intensive Cleaner.

For further advice on installation please contact **enquiries@claybrookstudio.co.uk** with any questions.

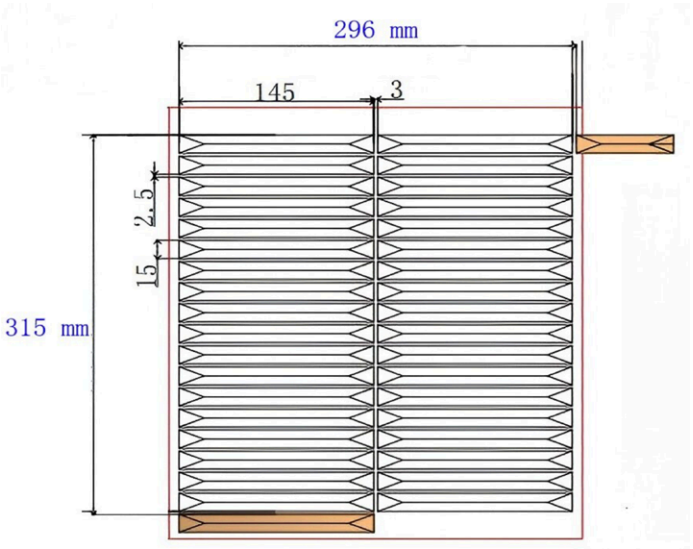

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

14.25