
Claybrook.

MEDITERRANO

These sensational Spanish-made wall tiles have a gorgeous glaze that reflects the light brilliantly, gifting them a real lustre. The longer and slimmer brick shape makes them ideal for using not just vertically or in herringbone formation, but in pairs to create distinctive stripes.

5 COLOURS / 1 FINISH / 1 FORMAT

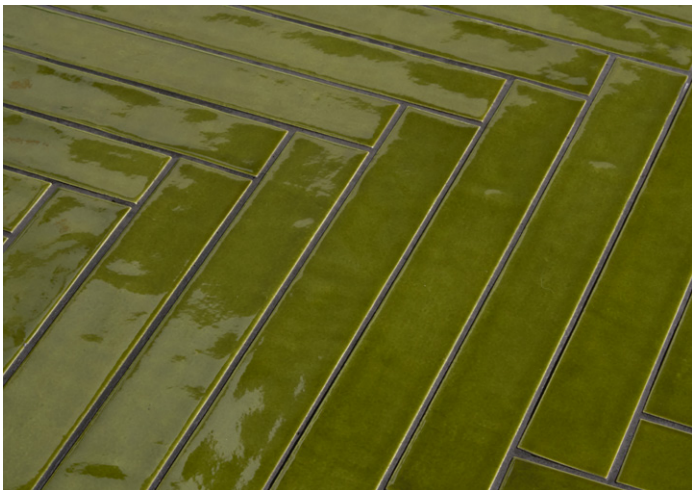

Mediterrano Olive Oil



Mediterrano Molasses

COLOURS



Caramel



Olive Oil



Turmeric



Molasses



Aqua

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Rectangle	40 x 310	8.5	Glazed Porcelain	All	3	42

Shade Variation / V2 - Slight

Material / Glazed Porcelain

Requires Sealing / No

Recycled Content / 46%

Print colours may vary from actual product, so tile samples should be requested before ordering.
For advice on shade variation of V3 and above, please speak to our showroom.
If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

1.10.25

Claybrook.

MEDITERRANO

Installation and Technical Advice

Planning & Layout - All substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable tile backer board or cement board. Do not use plasterboard

Cutting Advice - Use a water-cooled flat-bed tile cutter with a smooth-profiled unslotted blade and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding block. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

Sealing & Grouting Advice - We recommend using our Ardex FS format grout, as this has been tested with our products and is available to purchase online. We do not recommend using dark-coloured or fine grouts for joint widths down to 1mm (such as Bal MicroMax) as this can cause staining. If not using Ardex FS or FL grout, then please test your chosen grout on a sample before applying to the wall.

Installation Notes - For wall use only. These tiles slightly vary in dimension and thickness, especially between batches. If conducting your project in phases, you will ideally need to buy all the tiles required in one purchase. Also if you are planning on mixing different colours, please be aware they may vary slight in dimension, so please ask the showroom team to check the current batch and confirm compatibility with each other before purchasing.

Ongoing Maintenance - We recommend using EcoProtec's Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this is a ph neutral cleaner and will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec's Stone and Tile Intensive Cleaner.

For further advice on installation please contact **enquiries@claybrookstudio.co.uk** with any questions.

TECHNICAL DATA	INDUSTRY STANDARD	REQUIREMENT	PRODUCT VALUE
Length and Width	BS UNI ENISO 10545-2	0.6% +/- 2mm	≤0.6%
Thickness	BS UNI ENISO 10545-2	5% +/- 0.5mm	≤5%
Edge Straightness	BS UNI ENISO 10545-2	0.5% +/- 1.5mm	≤0.5%
Rectangularity	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%
Surface Flatness	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%
Surface Appearance (% of surface free of flaws)		≥95%	>95%
Water Absorption	BS UNI ENISO 10545-3	≤0.5%	<0.5%
Breaking Strength	BS UNI ENISO 10545-4	≥35N/mm2	≥40N/mm2
Resistance to Abrasion	BS UNI ENISO 10545-7	PEI	PEI 4
Thermal Shock Resistance	BS UNI ENISO 10545-9	Pass	Pass
Frost Resistance	BS UNI ENISO 10545-12	No alteration to surface	No alteration
Chemical Resistance (domestic)	BS UNI ENISO 10545-13	GB min	A
Stain Resistance (domestic)	BS UNI ENISO 10545-14	Class 3 min	Class 5

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk