


Claybrook.

MINO


There is something so eye-catching and beautiful in the colours and shapes of these porcelain wall mosaics. Influenced by traditional Japanese glazing techniques, the linear tiles are available in five fantastic shade options for a modern twist on classic style.

5 MOSAICS / 1 FINISH / 2 FORMAT

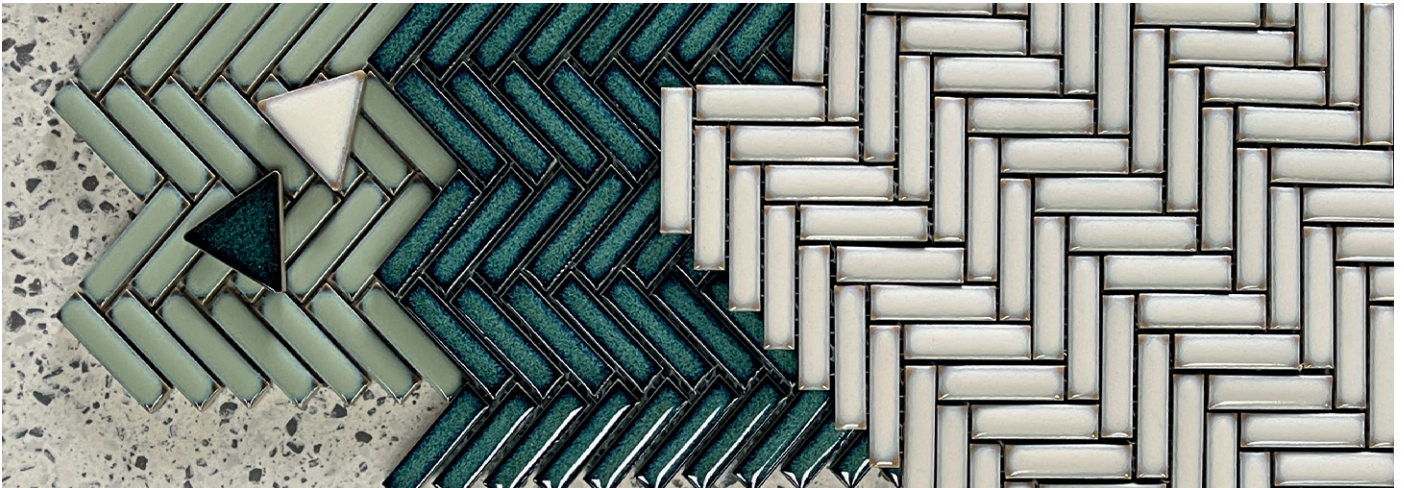


Mino Mosaics


COLOURS




Reo




Riku



Sara



Yui



Hina

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Triangle Mosaic	258 x 295	6	Glazed Porcelain	All	2	22
Herringbone Mosaic	306 x 299	6	Glazed Porcelain	All	2	22



Shade Variation / V2 - Slight



Requires Sealing / No



Material / Glazed Porcelain

Print colours may vary from actual product, so tile samples should be requested before ordering.

For advice on shade variation of V3 and above, please speak to our showroom.

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk



Claybrook.

MINO

Installation and Technical Advice

Planning & Layout - All substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls or joist floors, then all lateral movement must be made absolutely minimal using suitable plywood or cement board. Ideally the sheets should be installed in staggered rows, to minimise the visibility of the individual sheets. The individual mosaics can shift slightly on the mesh backing in production, so will need adjusting before the adhesive sets. Do not leave cut sheets on the wet surface of the tile cutter, otherwise the mosaics can start to come away for their mesh backing. Always use a full bed adhesive, with any excess removed before grouting.

Cutting advice - Use a water-cooled tile cutter and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding stone. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping can occur. For advice on keeping the blade edge keen, search 'Tile Blade Sharpening' on YouTube.

Sealing advice - No sealer required, even with dark grout, though we recommend using grout suitable for widths 2mm or greater, such as the Ardex FS grouts we recommend and sell. Some very fine grouts (down to 1mm) can cling to the surface, making the tiles more difficult to clean down after grouting.

For further advice on installation, please contact technical@claybrookstudio.co.uk with any questions.

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

