

Claybrook.

SCOLPITO

Perfect for home or commercial settings, these Italian mosaic tiles are available in a stunning series of colours in two varieties of sculptural finish. The light reflective surfaces of the glazed option create a dynamic movement for walls, while the matt tiles provide a quintessentially chic texture.

3 COLOURS / 2 FINISHES / 1 FORMAT




Scolpito Verde Gloss



Scolpito Bianco Gloss

COLOURS

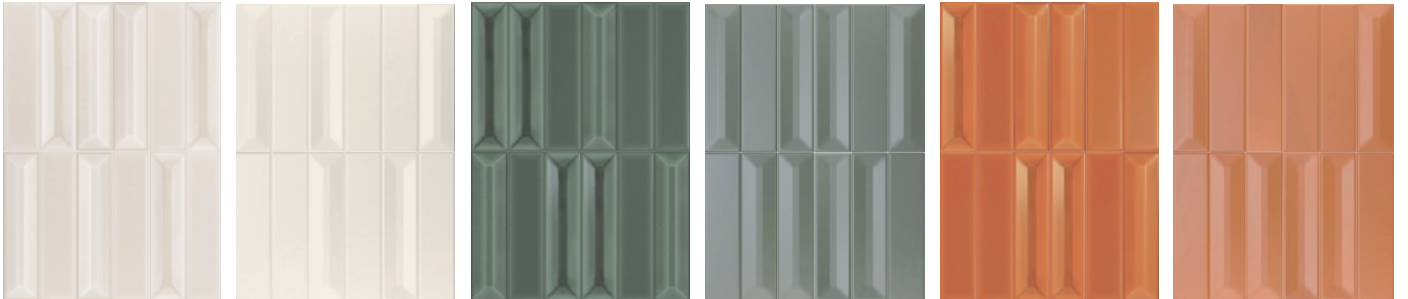

Bianco Gloss

Bianco Matt

Verde Gloss

Verde Matt

Arancia Gloss

Arancia Matt

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Mosaic	300 x 400	8.5	Glazed Ceramic	All	2	8



Shade Variation / V2 - Slight



Requires Sealing / No



Material / Glazed Ceramic

Print colours may vary from actual product, so tile samples should be requested before ordering. For advice on shade variation of V3 and above, please speak to our showroom.



Claybrook.

SCOLPITO

Installation and Technical Advice

Planning & Layout - all substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable plywood or cement board.

Cutting advice - use a water-cooled flat bed tile cutter and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding stone. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

Sealing & Grouting advice - no sealer required, however the application of EcoProtec Porcelain Tile Protector will assist with the removal of grout residue when installing the **mat finish**. To avoid excessive grout residue, we recommend using our Ardex FS format grout which has been tested with our products and is available to purchase online. We do not recommend using contrasting-coloured or fine grouts for joint widths down to 1mm, as these can cling to the surface making the tiles more difficult to clean-down after grouting.

Ongoing Maintenance – We recommend using EcoProtec’s Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec’s Stone and Tile Intensive Cleaner. The tile does not need re-sealing.

Installation Notes - For wall use only. Tiles may vary in colour from batch to batch. 5x20 glazed ceramic pieces mesh mounted onto 30x40 meshed backing. Each sheet contains a random mix of 3D and flat glazed surfaces. A sample will not show the full 30x40 mosaic sheet and overall 3D effect. This is for colour reference only.

For further advice on installation please contact technical@claybrookstudio.co.uk with any questions.

TECHNICAL DATA	INDUSTRY STANDARD	REQUIREMENT	PRODUCT VALUE
Length and Width	BS UNI ENISO 10545-2	0.6% +/- 2mm	≤0.6%
Thickness	BS UNI ENISO 10545-2	5% +/- 0.5mm	≤5%
Edge Straightness	BS UNI ENISO 10545-2	0.5% +/- 1.5mm	≤0.5%
Rectangularity	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%
Surface Flatness	BS UNI ENISO 10545-2	0.5% +/- 2mm	≤0.5%
Surface Appearance (% of surface free of flaws)		≥95%	>95%
Water Absorption	BS UNI ENISO 10545-3	≤0.5%	<0.5%
Breaking Strength	BS UNI ENISO 10545-4	≥30N/mm ²	≥30N/mm ²
Resistance to Light	DN 51094		Pass
Thermal Shock Resistance	BS UNI ENISO 10545-9	Pass	Pass
Frost Resistance	BS UNI ENISO 10545-12	No alteration to surface	No alteration
Chemical Resistance (domestic)	BS UNI ENISO 10545-13	GB min	GB
Stain Resistance (domestic)	BS UNI ENISO 10545-14	Declared value	Class 3

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

