Claybrook.


TAVOLOZZA

Gorgeous colours are the hallmark of this wall collection that has recycled content, with eight satin finish shades available within the eye-catching palette. The Moss, Linen and Petal colourways are also available in a beautifully curvaceous relief tile.

11 BASES / 2 FINISHES / 2 FORMATS




Tavolozza Meadow, Moss and Moss Curve

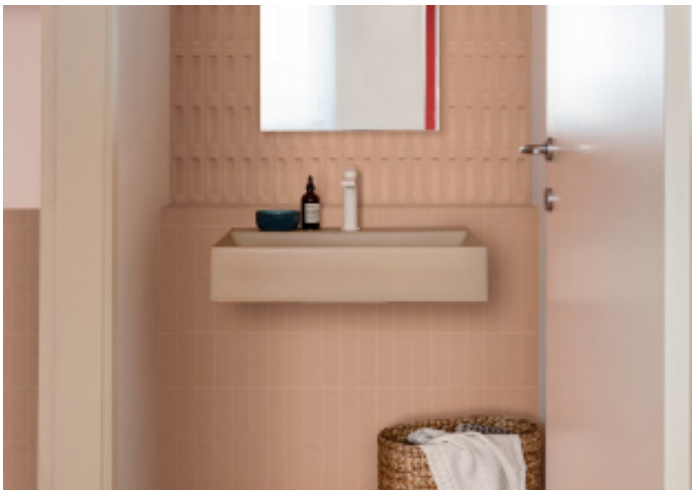


Tavolozza Petal and Petal Curve


VARIATION




Linen




Linen Curve




Petal



Petal Curve



Rust



Rust Curve

COLOURS

Linen



Linen Curve



Petal



Petal Curve



Rust



Rust Curve

Print colours may vary from actual product, so tile samples should be requested before ordering.
For advice on shade variation of V3 and above, please speak to our showroom.
If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

Claybrook.


TAVOLOZZA

Installation and Technical Advice

VARIATION




Taupe



Meadow



Moss



Moss Curve



Ice

COLOURS



Taupe



Meadow



Moss



Moss Curve



Ice

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)	BOX QTY
Rectangle	50 x 150	10	Glazed Ceramic	All	3	108
Rectangle - Relief	50 x 150	12.5	Glazed Ceramic	Linen, Petal, Moss, Rust	3	90

Shade Variation / V1 - Uniform

Material / Glazed Ceramic

Requires Sealing / No

Slip Rating / R9 * ask for details on floor use

Recycled Content / 23%

If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk

1.5.23

Claybrook.

TAVOLOZZA

Installation and Technical Advice

Planning & Layout - All substrates should be flat, sound and dust free. All wet areas need to be suitably tanked and if the tiles are being fixed to stud walls, then all movement must be made absolutely minimal using suitable plywood or cement board. Do not use plasterboard

Cutting Advice - Use a water-cooled flat-bed tile cutter and plan the tile layout to avoid cuts less than 15mm where possible. Always cut through the tile with the visible face uppermost and tidy any slight chipping with a rubbing/sanding stone. Ensure the blade is kept clean with a keen cutting edge, otherwise excess chipping will occur.

Sealing & Grouting Advice – Please use our Ardex FL or FS format grout, which has been tested with our products and is available to purchase online. We do not recommend using contrasting-coloured or fine grouts for joint widths down to 1mm (such as Bal MicroMax) , as these can make the tiles difficult to clean-down after grouting.

Ongoing Maintenance – We recommend using EcoProtec's Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this is a ph neutral cleaner and will not affect the tiles surface or grout. For an occasional deeper clean, you can use EcoProtec's Stone and Tile Intensive Cleaner.

For further advice on installation please contact technical@claybrookstudio.co.uk with any questions.

Print colours may vary from actual product, so tile samples should be requested before ordering.
For advice on shade variation of V3 and above, please speak to our showroom.
If you require any further assistance regarding specification data, technical advice or samples, please contact enquiries@claybrookstudio.co.uk or technical@claybrookstudio.co.uk