


K


TAP-BEL-BAT-MIX (VCS6K30) deck mounted bath / shower mixer lever






Dimension Key

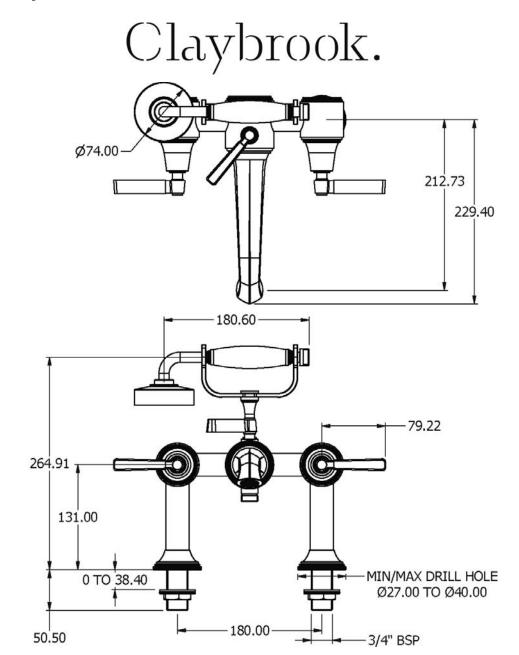

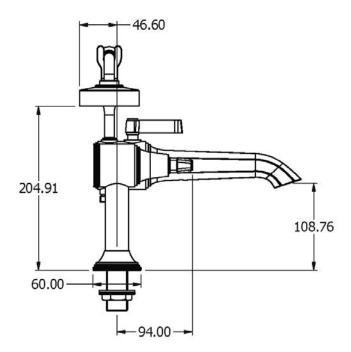

Claybrook.

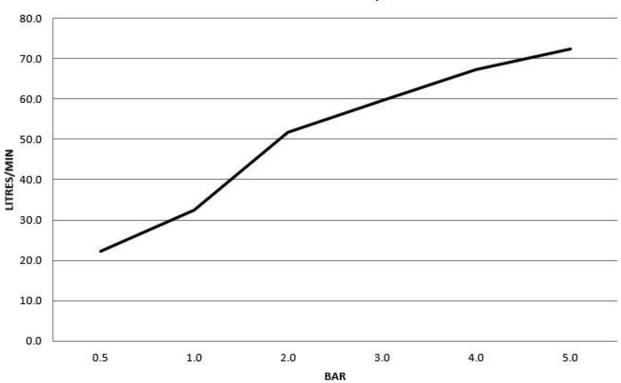


FLOW RATE LITRES/MIN

The flow rate data provided in this document is indicative of each product and is given in an open outlet condition. Installation design, external connections and fittings not supplied may affect the data provided.



Claybrook.

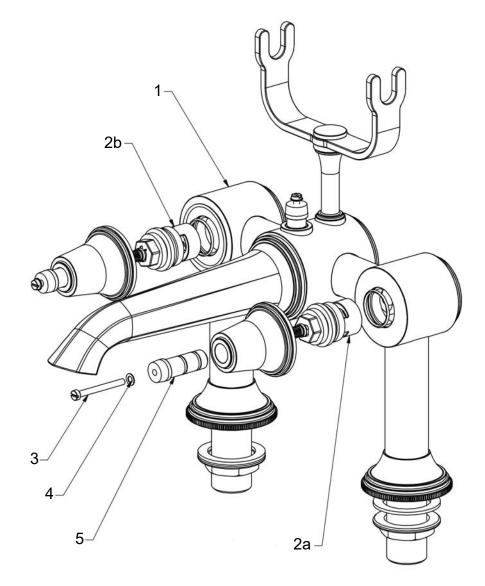

ltem	Part No.	Description
1	-	Inlet Body
2a	-	CD Valve (Anti-Clockwise Closing)
2b	-	CD Valve (Clockwise Closing)
3	-	Screw
4	-	Washer
5	-	Sider Body Spindle
5		

Claybrook.

IMPORTANT NOTES

- **1.** Installation should be carried out by a competent engineer, in accordance with water regulations.
- **2.** Before installation, ensure supply pipes are flushed clean. Debris or loose particles will affect the efficiency of the ceramic disc cartridge.
- **3.** For mixer taps, it is recommended that hot & cold pressures are equally balanced.
- 4. To help maintain the high quality finish, please clean with a soft damp cloth. Do not use abrasive polish or cleaners. Stains may be removed using undiluted washing up liquid.
- 5. Ceramic cartridges in hard water areas. To prolong the lifespan and reduce servicing periods of your tap we recommend that a suitable water softener be fitted. Consult your installer/designer for details.
- 6. Please note that as with all tap and shower ware it will be necessary from time to time for the products to be serviced, this should be carried out by a qualified Plumbing Engineer.

Claybrook 123 Curtain Road Shoreditch London EC2A 3BX

Tel: 020 7052 1555