Claybrook.

CLA-WC-3160-B00

WALL HUNG TOILET

CONTENTS

Contents & Introduction	1
Close Coupled Toilet Line Drawing	2
Close Coupled Toilet Installation	3
Close Coupled Toilet Installation (Cont.)	4
Close Coupled Toilet Installation (Cont.)	5
Toilet Seat Installation	6
Trouble Shooting, Operation And Maintenance	7

INTRODUCTION

To The Installing Plumber:
Please leave this instruction manual for the customer.


DO NOT USE Concrete, Sand & Cement Mix or any other similar product when installing the pan, doing so will void product warranty.


Prior to Installation
Visual inspection & installation requirements:


1. All product to be removed from packaging and checked to ensure the product is in good order and condition and that all parts required for correct installation have been supplied. Any product that is faulty or has parts missing is to be returned following our returns T&C's.

2. All sanitary ware products must be installed by a licensed plumber in accordance with the relevant installation instructions and all U.K. standards and local authority requirements.

WALL HUNG TOILET LINE DRAWING

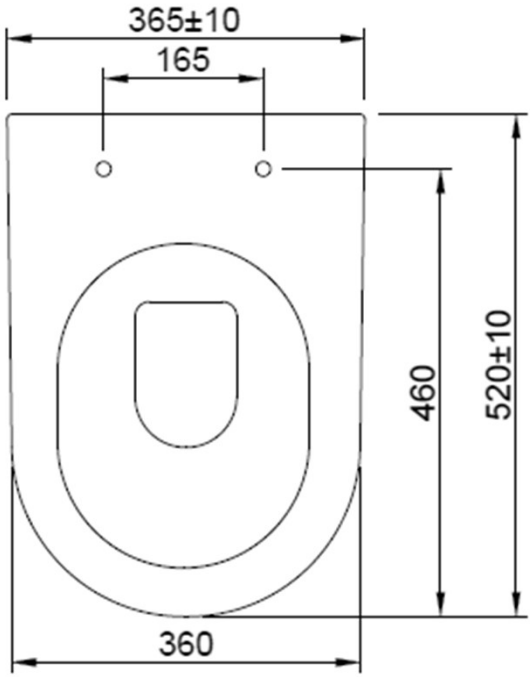

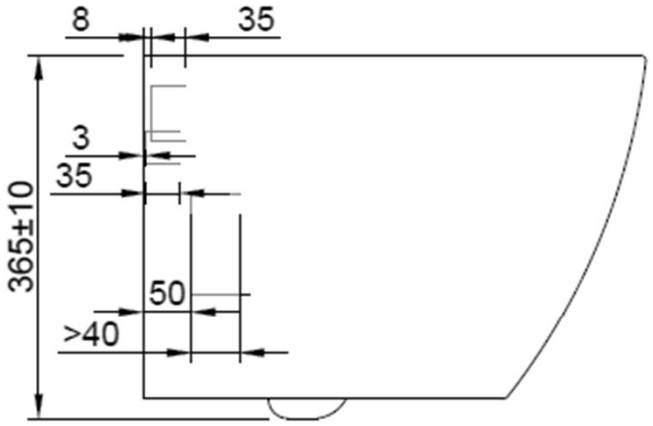

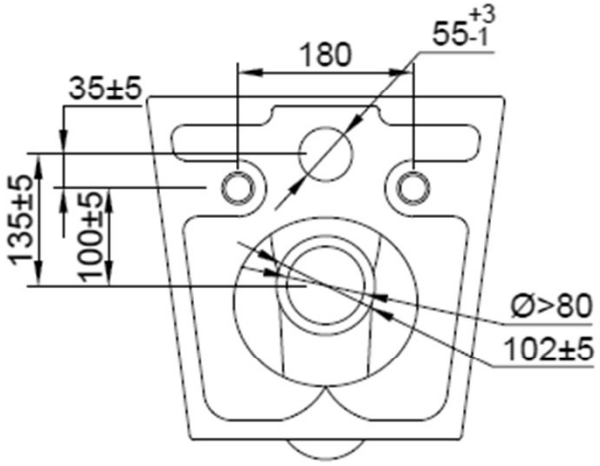

WALL HUNG TOILET INSTALLATION

Pre-install the "in wall cistern" and frame according to its individual installation instructions. Remove the pan from the box. Install the nylon mounting blocks through the closet mounting holes with the hexagonal head and hex key on the inside and fix by screwing the flanged end loosely on from the back (Fig 1).
Place the hex key through the seat bolt hole into the grub screw to align the hexagonal head (Fig 2).
Tighten the flange from the back (Fig 3).

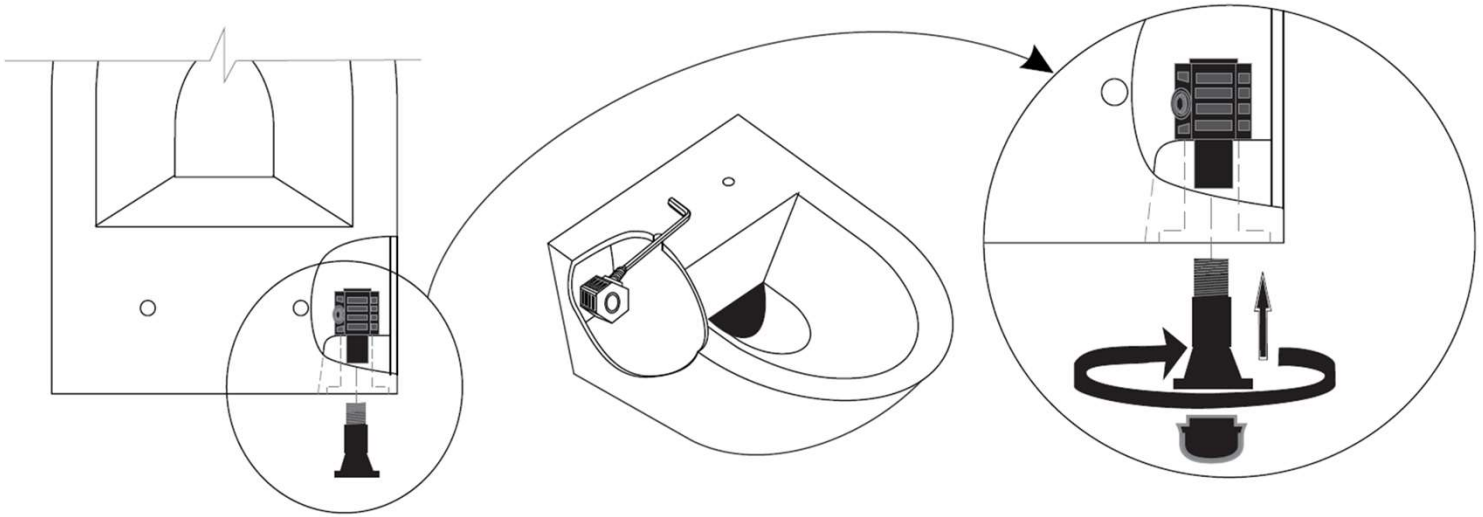


Fig 1 Fig 2 Fig 3

WALL HUNG TOILET INSTALLATION (CONT.)

The pan fixing bolts protrude from the bracket out through the finished wall (Fig 4).
Screw the pan fixing studs onto the pan fixing screws, so that the center of the dimples in the studs finish 70mm from the finished wall and in the same orientation as the hex key screws in the black nylon mounting blocks (Fig 5).
Install a pan connector so that the end of the connector finishes 50mm from the finished wall. Fit the kee seal to the protruding inlet pipe (Fig 6).

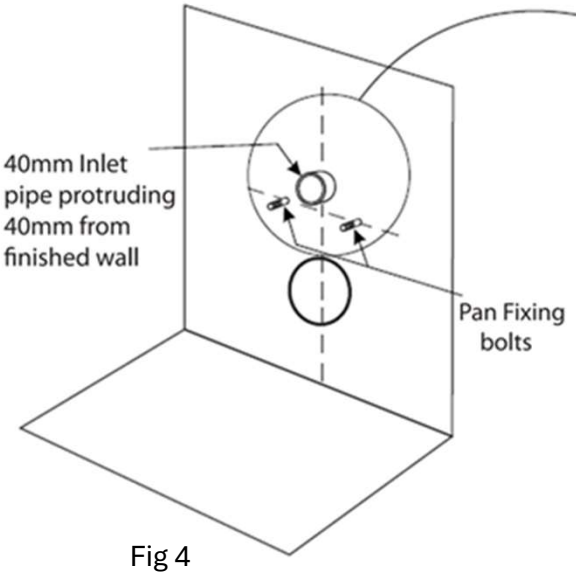


Fig 4

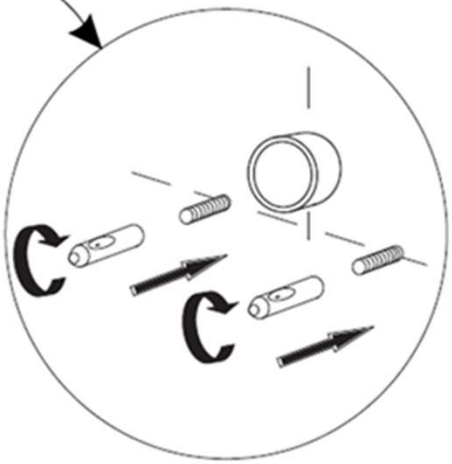


Fig 5

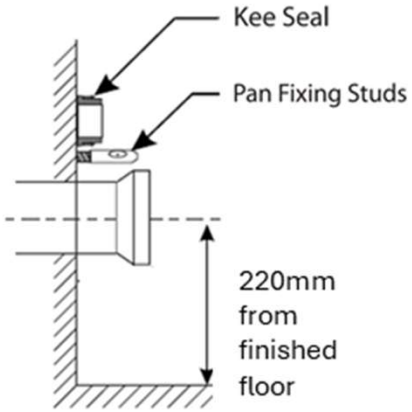


Fig 6

WALL HUNG TOILET INSTALLATION (CONT.)

Lubricate the kee seal and pan connector rubber and lift and carefully guide the pan back onto the pan fixing studs, ensuring a proper engagement of the inlet and outlet connections (Fig 7).
While holding the pan in position against the wall fit the hex key through the seat bolt holes and tighten the grub screws into the pan fixing studs (Fig 8).
Flush the pan and check for leaks. Run a bead of silicone around the back edge of the pan and clean up.

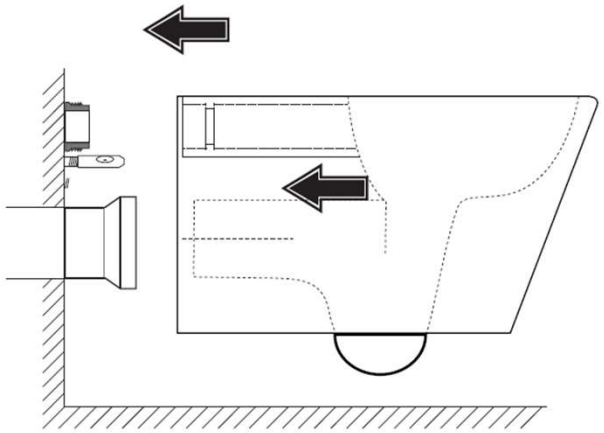


Fig 7

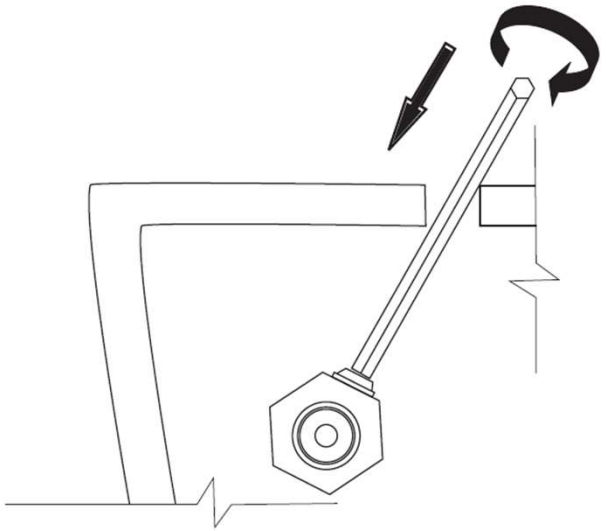


Fig 8

TOILET SEAT INSTALLATION

Remove the seat and cover from its box. Insert the top fixing rawl plugs into the seat bolt holes. Place the hinge blocks, without the stainless-steel covers, over the rawl plugs and loosely fix the screw though the hinge blocks into the rawl plugs (Fig 9).
Fit the seat and cover onto the hinge blocks by locating the fixing holes onto the hinge pins and push into place. Close the seat and cover onto the pan and adjust the position in line with the rim of the pan. Tighten the screws. Open the seat and cover and depress the quick fix buttons to remove the seat and cover. Place the stainless-steel covers over the hinge blocks and replace the seat (Fig 10).

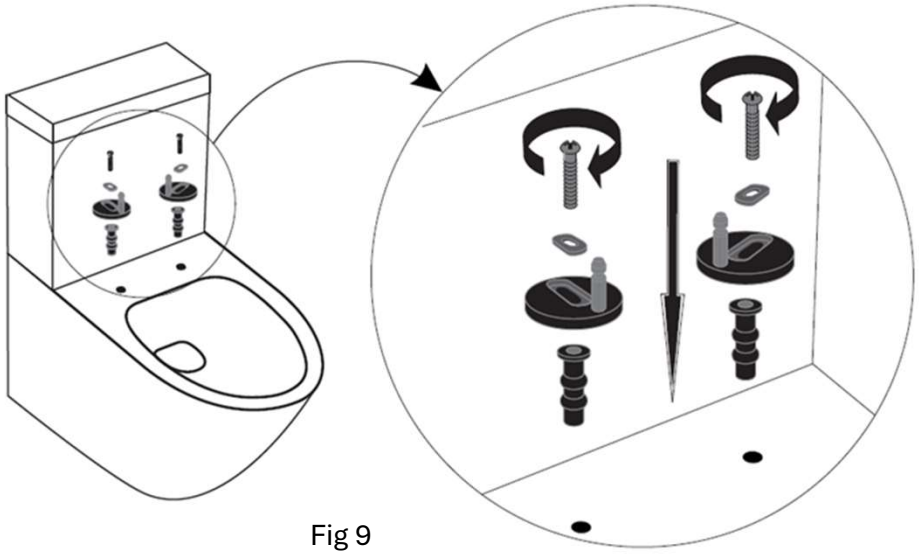


Fig 9

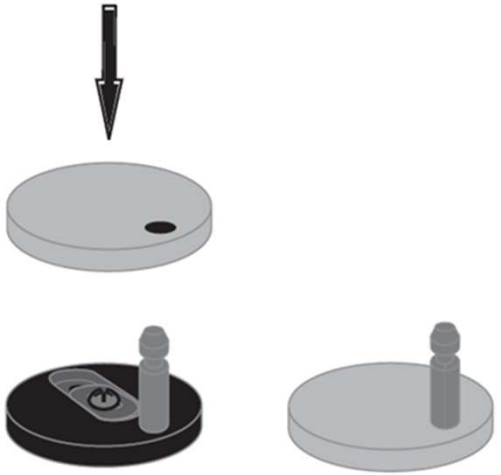


Fig 10

TROUBLE SHOOTING, OPERATION AND MAINTENANCE

Trouble Shooting

Problem	Possible Cause	Solution
Water is leaking into the pan.	Water level is set too high.	Re-adjust the inlet valve to lower the water level below the overflow pipe height.
	Outlet valve seal is leaking.	Remove outlet valve and clean outlet seal and seat or replace outlet seal.
Water is leaking onto the floor.	Flexible hose or connections are leaking.	Retighten connections or replace hose.
	Cistern fitting components are leaking.	Check and retighten Outlet, Inlet and plug nuts.
	Outlet connector broken or not engaged correctly.	Uninstall pan and check connector. Engage pan correctly, and/or replace connector.

Operation And Maintenance

- For Non-Solid Waste removal use the half flush button to conserve water.
- To clean the toilet suite only use warm soapy water, DO NOT use chemical cleaners.
- Do not place chemical additives into the cistern tank as chemical additives can deteriorate the sealing rubber and valve components.

Claybrook.

CONTACT US

+44 (0) 20 7052 1555

enquiries@claybrookstudio.co.uk

contracts@claybrookstudio.co.uk