

Claybrook.


# HAVEN MOSAICS

Designed by the in-house team here at Claybrook and produced from the same striking stones as our Haven marble tile collection, our exclusive Haven mosaics have characterful designs and strong lines.

1 FINISH / 6 MOSAICS



Haven Mosaics Cove

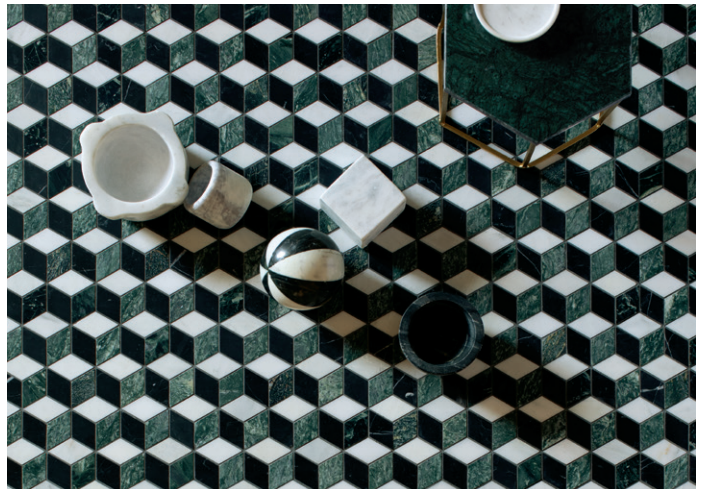

Haven Mosaics Checkers

## MOSAICS



Cove



Lake



Millpond



Columbus



Belvedere



Checkers

FORMAT	SIZE (mm)	THICKNESS (mm)	FINISH	COLOURS	RECOMMENDED GROUT WIDTH (mm)
Cove Mosaic	300 x 347	10	Stone and Marble	All	3
Lake Mosaic	266 x 308	10	Stone and Marble	All	3
Millpond Mosaic	304 x 351	10	Stone and Marble	All	3
Columbus	315 x 363	10	Stone and Marble	All	3
Belvedere	302 x 302	10	Stone and Marble	All	3
Checkers	314 x 325	10	Stone and Marble	All	3



Shade Variation / V3 - Moderate



Requires Sealing / Yes



Material / Stone and Marble

Print colours may vary from actual product, so tile samples should be requested before ordering. For advice on shade variation of V3 and above, please speak to our showroom.

If you require any further assistance regarding specification data, technical advice or samples, please contact [enquiries@claybrookstudio.co.uk](mailto:enquiries@claybrookstudio.co.uk) or [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk)



# HAVEN MOSAICS

## Installation and Technical Advice

**Planning & Layout** - All substrates should be flat, movement-free, dust-free and primed using Ardex P51 Primer and Bonding Agent. We do not recommend marble tiles for wet-room floors, however they can be used on shower walls if the substrate is suitably tanked and any movement is made absolutely minimal. We do not recommend fixing any tile directly to standard plasterboard and/or walls that have been skimmed with a thin coat of plaster. We recommend the use of tile backer board and/or a membrane system in any wet areas.

**Cutting Advice** – We recommend using a flat-bed water-cooled tile cutter and planning the tile layout in such a way to avoid cuts less than 15mm. Always cut through the tile with the visible face uppermost and tidy any chipping with a rubbing/sanding stone or wet and dry paper. Ensure the tile cutter blade is sharp, clean, unslotted and continuous with a smooth cutting face. Also ensure the water is regularly changed otherwise excess staining can occur.

**Sealing & Grouting Advice** – For full details on sealing and grouting, please ask your installer to read the Marble Installation Guide. With natural marble tiles, it is recommended to use Ardex X7W standard set white adhesive, as grey coloured adhesive/grout can 'dull' the marble's natural translucence. For most projects we recommend sealing the tiles with 2 coats of EcoProTec Natural Finish Stone Sealer before grouting with Ardex FS or Ardex FL grout, then applying another coat once the grout has been cleaned off and the floor is completely dry. For a more intense colour effect without the use of a finishing wax, EcoProTec Colour Enhancing Stone Sealer can be used in place of the Natural Finish Stone sealer.

**Ongoing Maintenance** – We recommend using EcoProTec Stone and Porcelain Aftercare Cleaner for daily cleaning purposes, as this will not attack the surface of the tile or grout. For an occasional deep clean, you can use EcoProTec Intensive Cleaner at the dilution advice on the bottle. For advice on commercial installations please see the Installation guide or contact [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk) with any questions.

If you require any further assistance regarding specification data, technical advice or samples, please contact [enquiries@claybrookstudio.co.uk](mailto:enquiries@claybrookstudio.co.uk) or [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk)

**Installation Notes:** East Haven marble features a variety of gold and grey veining. This is a natural characteristic of the stone, making each tile beautifully unique.

TECHNICAL DATA	INDUSTRY STANDARD	REQUIREMENT	PRODUCT VALUE
Length and Width	BS UNI ENISO 10545-2	0.5% +/- 2mm	0.15%
Thickness	BS UNI ENISO 10545-2	10% +/- 0.5mm	5%
Edge Straightness	BS UNI ENISO 10545-2	0.3% +/- 1.5mm	0.1%
Rectangularity	BS UNI ENISO 10545-2	0.5% +/- 2mm	0.2%
Surface Flatness	BS UNI ENISO 10545-2	0.5% +/- 2mm	0.35%

If you require any further assistance regarding specification data, technical advice or samples, please contact [enquiries@claybrookstudio.co.uk](mailto:enquiries@claybrookstudio.co.uk) or [technical@claybrookstudio.co.uk](mailto:technical@claybrookstudio.co.uk)

